



MAIGA & CO®

INTERNATIONAL



ALLAH KI YIRIWA



+90 535 941 47 28

+223 74 73 00 06

WWW.MAIGACO.COM

MAHAMADOUAIGA906@YAHOO.COM

ZAFER MAH ADILE NASIT BULVARI SEHIR MERKEZI
HOME OFIS BLOK KAT 16 No 191 ESENYURT ISTANBUL

Electric Fryer



ZQW-81



ZQW-82

Mill Grinder



Chopper A30



ZQW-2200

Gas Patio Heater



ZQ-101



ZQ-302

Hot Dog Maker



Guitar Cutter



Gas Fryer



ZQW-71A



ZQW-72A



ZQW-73A



ZQR-25C



ZQR-9228



ZQR-8226



ZQR-25CTB



ZQR-9228T



ZQR-FP1R-6C



**Fried Ice Cream Machine
ZQR-FP1S**



ZQR-202



**Hard Ice Cream
Machine
ZQR-116Y**



ZQR-25X



ZQR-202B



ICE CREAM Machine



MAIN TECHNICAL Parameters:

Model	ZQR-390
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	4.2kW
Refrigerant	R22/R404A
Production(L/h)	60-65L/h
Packing Size(mm)	895x755x1700



MAIN TECHNICAL Parameters:

Model	ZQR-112Y
Main Power	220v/50Hz
Rate Power(kW)	2.65kW
Refrigerant	R22/R404A
Production(L/h)	20L/h
Packing Size(mm)	500x550x700



MAIN TECHNICAL Parameters:

Model	ZQR-28s
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	2.2kW
Refrigerant	R22/R404A
Production(L/h)	28-35L/h
Packing Size(mm)	630x910x1600



MAIN TECHNICAL Parameters:

Model	ZQR-38s
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	2.8kW
Refrigerant	R22/R404A
Production(L/h)	44-55L/h
Packing Size(mm)	630x910x1700



MAIN TECHNICAL Parameters:

Model	ZQR-48s
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	5.8kW
Refrigerant	R22/R404A
Production(L/h)	80-95L/h
Packing Size(mm)	610x1240x1700



MAIN TECHNICAL Parameters:

Model	ZQR-806
Main Power	220v/50Hz/60Hz
Rate Power(kW)	0.86kW
Refrigerant	R404A
Packing Size(mm)	1300x800x1400

ICE CREAM Showcase



MAIN TECHNICAL Parameters:

Model	ZQR-10P
Main Power	220v/50Hz
Rate Power(kW)	0.6kW
Refrigerant	R22/R404A
Packing Size(mm)	1100x600x1300



MAIN TECHNICAL Parameters:

Model	ZQR-12P	ZQR-14P
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	1.2kW	1.4kW
Temp. Range(°C)	-15~-20	-15~-20
Packing Size(mm)	1200x1080x1250	1500x1080x1250

ICE BLOCK & POPSICLE



Machine

Maquina de gelado de despedacar

Ice Block Machine makes the ice block from pure water and gets rid from salt water, no chemical, clean and special for eating.



MAIN TECHNICAL Parameters:

Model	ZQR-0.5T	ZQR-1T
Main Power	110v/220v 50Hz/60Hz	110v/220v 50Hz/60Hz
Rate Power(kW)	3.5kW	3.7kW
Refrigerant	R22/R404A	R22/R404A
Production(pcs/day)	960	960
Packing Size(mm)	1600x625x1000	1790x625x1000

Model	ZQR-2T	ZQR-3T	ZQR-4T
Main Power	110v/220v 50Hz/60Hz	110v/220v 50Hz/60Hz	110v/220v 50Hz/60Hz
Rate Power(kW)	8.1kW	11.1kW	11.1kW
Refrigerant	R22/R404A	R22/R404A	R22/R404A
Production(pcs/day)	2000	3000/4000	3000/4000
Packing Size(mm)	3600x1108x1250	3600x1900x1250	3600x1900x1250



MAIN TECHNICAL Parameters:

Model	ZQR-18M
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	7kW
Refrigerant	R22/R404A
Production(pcs/day)	54000
Packing Size(mm)	3035x1700x925

POPSICLE Machine



MAIN TECHNICAL Parameters:

Model	ZQR-10M	ZQR-12M
Main Power	110v/220v 50Hz/60Hz	110v/220v 50Hz/60Hz
Rate Power(kW)	3.7kW	5.7kW
Refrigerant	R22/R404A	R22/R404A
Production(pcs/day)	38000	38000-40000
Packing Size(mm)	2070x730x1480	3370x800x1480



MAIN TECHNICAL Parameters:

Model	ZQR-06M	ZQR-08M
Main Power	110v/220v 50Hz/60Hz	110v/220v 50Hz/60Hz
Rate Power(kW)	3.8kW	4.2kW
Refrigerant	R22/R404A	R22/R404A
Production(pcs/day)	26000-28000	30000-32000
Packing Size(mm)	1780x800x1480	2170x800x1480



MAIN TECHNICAL Parameters:

Model	ZQR-01M
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	1.2kW
Refrigerant	R22/R404A
Production(pcs/day)	3000
Packing Size(mm)	715x685x1390



MAIN TECHNICAL Parameters:

Model	ZQR-02M
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	1.9kW
Refrigerant	R22/R404A
Production(pcs/day)	8000-10000
Packing Size(mm)	965x800x1480

Model	ZQR-04M
Main Power	110v/220v 50Hz/60Hz
Rate Power(kW)	3.0kW
Refrigerant	R22/R404A
Production(pcs/day)	16000-18000
Packing Size(mm)	1355x800x1480

Perfect technology, full coating to guard against ultraviolet radiation, tested for safety, distinctive brand presentation and reliable logistics. Specially developed cooling system make sure the beer is exactly the right temperature.



POPSICLE
Cart

OUTDOOR

ZQP00

ZQP07



Suit for tea restaurant equipment, cake room equipment, coffee shop equipment, bakery equipment, western food shop equipment, drinks shop equipment, Chinese food shop equipment, leisure food factory equipment.



ZOR-ET2



ZOR-ET4



ZQR-ET12



ZOR-ET24

Model	ZQR-ET2	ZQR-ET4	ZQR-ET10	ZQR-ET12	ZQR-ET24	ZQR-ET24 C	ZQR-ET32	ZQR-ET32 C	ZQR-ET40
Capacity(Pc/Hour)	50-60	100-120	250-300	300-350	600-800	600-800	800-1000	800-1000	800-1000
Power(KW)	1.5	2.4	4.5	6.5	12	12	15	15	13.5
Paking Size(mm)	500x400 x770	570x520 x770	970x680 x1200	940x760 x1070	1140x960 x1150	890x820 x1560	1280x960 x1150	900x1000 x1540	1550x900 x1550
Gross Weight(Kgs)	54	95	230	200	330	400	380	510	300
Available Mold Type									

CUBE ICE Machine

Maquina de quadrado gelado



Gadali leading ice making technology to the small cube ice machine; it produces high quality transparent and sanitary cube ice, this commercial type commercial cube ice maker are compact design, easy operate, highly efficient, energy saving, safe and environmentally friendly and are quickly becoming the most popular choice for clients around the world.



MAIN TECHNICAL Parameters:

Model	ZQR-25	ZQR-40	ZQR-60
Main Power	220v/50Hz	220v/50Hz	220v/50Hz
Rate Power(kW)	0.46kW	0.5kW	0.69kW
Refrigerant	R134A	R134A	R22
Production(pound/kg)	25	40	60
Dimensions(mm)	400x495x790	495x535x870	670x570x920

ICE Machine

MAIN TECHNICAL Parameters:

Model	ZQR-55A
Main Power	220v/50Hz
Rate Power(kW)	0.3kW
Refrigerant	R134A
Production(pound/kg)	55/25
Dimensions(mm)	500x580x830

MAIN TECHNICAL Parameters:

Model	ZQR-80A
Main Power	220v/50Hz
Rate Power(kW)	0.39kW
Refrigerant	R134A
Production(pound/kg)	80/36
Dimensions(mm)	500x580x830

MAIN TECHNICAL Parameters:

Model	ZQR-100A
Main Power	220v/50Hz
Rate Power(kW)	0.46kW
Refrigerant	R22
Production(pound/kg)	100/45
Dimensions(mm)	500x580x850



ICE Machine

MAIN TECHNICAL Parameters:

Model	ZQR-150A
Main Power	220v/50Hz
Rate Power(kW)	0.58kW
Refrigerant	R22/R404
Production(pound/kg)	150/68
Dimensions(mm)	660x680x920

MAIN TECHNICAL Parameters:

Model	ZQR-200A
Main Power	220v/50Hz
Rate Power(kW)	0.65kW
Refrigerant	R22/R404
Production(pound/kg)	200/90
Dimensions(mm)	660x680x920

MAIN TECHNICAL Parameters:

Model	ZQR-260A
Main Power	220v/50Hz
Rate Power(kW)	0.72kW
Refrigerant	R22/R404
Production(pound/kg)	260/120
Dimensions(mm)	660x680x950

CUBE ICE Machine

Maquina de quadrado gelado



Cube Ice Machine is popular use in hotel, restaurant, bar etc. It make small cube ice can use in beverage and cooling drinks.



MAIN TECHNICAL Parameters:

Model	ZQR-1500A	ZQR-2000A
Main Power	380V/50Hz	380V/50Hz
Rate Power(kW)	2.8kW	3.6kW
Refrigerant	R22/R404A	R22/R404A
Production(pound/kg)	1500/681	2000/908
Dimensions(mm)	1220x635x78	1220x635x78



MAIN TECHNICAL Parameters:

Model	ZQR-300A	ZQR-500A
Main Power	220V/50Hz	220V/50Hz
Rate Power(kW)	0.8kW	1.18kW
Refrigerant	R22/R404A	R22/R404A
Production(pound/kg)	300/140	500/227
Dimensions(mm)	560x610x560	760x630x680



MAIN TECHNICAL Parameters:

Model	ZQR-700A	ZQR-1000A
Main Power	220V/50Hz	220V/50Hz
Rate Power(kW)	1.35kW	1.86kW
Refrigerant	R22/R404A	R22/R404A
Production(pound/kg)	700/318	1000/454
Dimensions(mm)	760x630x680	760x630x720

FLAKE ICE Machine



INSTANCE



MAIN TECHNICAL Parameters:

Model	ZQR-04K	ZQR-05K	ZQR-06K
Rate Power(kW)	2.4kW	2.4kW	2.9kW
Refrigerant	R404A	R404A	R404A
Production/Ton(D)	0.4	0.5	0.6
Dimensions(mm)	1225x740x724	1225x740x724	1225x740x724

MAIN TECHNICAL Parameters:

Model	ZQR-10K	ZQR-12K	ZQR-15K
Rate Power(kW)	4.0kW	4.8kW	6.2kW
Refrigerant	R404A	R404A	R404A
Production/Ton(D)	1.0	1.2	1.5
Dimensions(mm)	1225x740x874	1411x980x920	1410x980x946

MAIN TECHNICAL Parameters:

Model	ZQR-450	ZQR-700	ZQR-1200	ZQR-1800
Main Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Rate Power(kW)	1.2kW	1.6kW	2.3kW	3.3kW
Refrigerant	R22	R22	R22	R22
Production(pound/kg)	220	310	540	800
Dimensions(mm)	600x820x1420	760x820x1700	760x820x1820	1220x820x1850



SLUSH Machine

Maquina de gao neve

2 in 1 function, which not only can make granita slush drink, but also can used for Juice dispensers if you need. With Keep fresh system, maintains safe product temperature in the cooling cylinder during long no-use periods.



ZQR-3X



MAIN TECHNICAL Parameters:

Model	ZQR-2X
Main Power	220v/50Hz
Rate Power(kW)	1.3kW
Volume(L)	24
Dimensions(mm)	365x475x700

MAIN TECHNICAL Parameters:

Model	ZQR-3X
Main Power	220v/50Hz
Rate Power(kW)	1.3kW
Volume(L)	36
Dimensions(mm)	545x475x700

MAIN TECHNICAL Parameters:

Model	ZQR-240	ZQR-360
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.7kW	0.9kW
Volume(L)	2x15	3x15
Dimensions(mm)	450x580x780	630x580x780



MAIN TECHNICAL Parameters:

Model	ZQR-12x2
Main Power	220v/50Hz
Rate Power(kW)	0.6kW
Volume(L)	2x12
Dimensions(mm)	420x660x800



MAIN TECHNICAL Parameters:

Model	ZQR-115	ZQR-230	ZQR-345
Main Power	220v/50Hz	220v/50Hz	220v/50Hz
Rate Power(kW)	0.15kW	0.25kW	0.37kW
Volume(L)	15	2x15	3x15
Dimensions(mm)	210x450x665	410x450x665	610x450x665



JUICE Machine



ZQR-115



ZQR-230



MAIN TECHNICAL Parameters:

Model	ZQR-240A
Main Power	220v/50Hz
Rate Power(kW)	0.89kW
Volume(L)	24
Dimensions(mm)	430x530x800

MAIN TECHNICAL Parameters:

Model	ZQR-360A
Main Power	220v/50Hz
Rate Power(kW)	1.1kW
Volume(L)	36
Dimensions(mm)	620x530x800



MAIN TECHNICAL Parameters:

Model	ZQR-2T
Main Power	220v/50Hz
Rate Power(kW)	0.49kW
Refrigerant	R134A
Volume(L)	2x18
Dimensions(mm)	620x380x660

MAIN TECHNICAL Parameters:

Model	ZQR-3T
Main Power	220v/50Hz
Rate Power(kW)	0.65kW
Refrigerant	R134A
Volume(L)	3x18
Dimensions(mm)	920x380x660



MAIN TECHNICAL Parameters:

Model	ZQR-10x4
Main Power	220v/50Hz/60Hz
Rate Power(kW)	0.35kW
Volume(L)	4x10
Dimensions(mm)	630x470x720

COMMERCIAL

Freezer

Maquina de geladeira

The micro electric central processor precisely adjusts the desired temperature which is displayed on the LCD. (Refrigerator: -5°C~+10°C; Freezer: -180°C~-2°C). Quality stainless steel provides great durability and appearance, meeting all food license requirements.



MAIN TECHNICAL Parameters:

Model	ZQR-1.0L ₂
Main Power	220v/50Hz
Rate Power(kW)	0.75kW
Refrigerant	R404A
Temp. Range(°C)	-25~ -10
Dimensions(mm)	1210x760x1980



MAIN TECHNICAL Parameters:

Model	ZQR-1.0L ₄
Main Power	220v/50Hz
Rate Power(kW)	0.485kW
Refrigerant	R134A
Temp. Range(°C)	-5~-10/-18~-2
Dimensions(mm)	1220x760x1980



MAIN TECHNICAL Parameters:

Model	ZQR-1.6L ₆
Main Power	220v/50Hz
Rate Power(kW)	0.75kW
Refrigerant	R134A
Temp. Range(°C)	-5~-10/-18~-2
Dimensions(mm)	1830x760x1980



MAIN TECHNICAL Parameters:

Model	ZQR-G1.0L ₂
Volume(L)	880
Rate Power(kW)	0.236kW
Temp. Range(°C)	0~-10
Dimensions(mm)	1210x700x1890



MAIN TECHNICAL Parameters:

Model	ZQR-0.4Lx2
Volume(L)	840
Rate Power(kW)	0.351kW
Temp. Range(°C)	-5~-5/-5~-15
Dimensions(mm)	1210x700x1890

Model	ZQR-0.4Lx3
Volume(L)	1305
Rate Power(kW)	0.435kW
Temp. Range(°C)	-5~-5/-5~-15
Dimensions(mm)	1820x700x1890

REFRIGERATION Cabinet



MAIN TECHNICAL Parameters:

Model	ZQR-2.1L ₂
Main Power	220v/50Hz
Rate Power(kW)	0.28kW
Refrigerant	R134A
Temp. Range(°C)	0~10
Dimensions(mm)	2100x760x800



MAIN TECHNICAL Parameters:

Model	ZQR-1.5L ₂	ZQR-1.8L ₂
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.22kW	0.26kW
Refrigerant	R134A	R134A
Temp. Range(°C)	-5~-10/-18~-2	-5~-10/-18~-2
Dimensions(mm)	1500x760x800	1800x760x800

SALAD Bar

Plata forma de salao

304 Stainless Steel Display Salad Bar for salad, imported 304 stainless steel, wooden packing with foam, suitable for salad.



ZQR-0.3L2W



ZQR-0.2L1T2W



ZQR-0.3S2W

MAIN TECHNICAL Parameters:

Model	ZQR-0.3L2W	ZQR-0.4L2W	ZQR-0.2L1T2W	ZQR-0.3L2T2W	ZQR-0.3S2W	ZQR-0.2S2W
Main Power	220v/50Hz	220v/50Hz	220v/50Hz	220v/50Hz	220v/50Hz	220v/50Hz
Rate Power(kW)	0.3kW	0.32kW	0.3kW	0.36kW	0.32kW	0.35kW
Refrigerant	R134A	R134A	R134A	R134A	R134A	R134A
Temp. Range(°C)	+1~+4	+1~+4	+1~+4	0~10	+1~+4	0~10
Dimensions(mm)	1200x760x1080	1500x760x1080	900x700x850	1365x700x850	900x700x1230	1365x700x1230



MAIN TECHNICAL Parameters:

Model	ZQR-1200	ZQR-1500
Volume(m ³)	0.035	0.05kW
Refrigerant	R134A	R134A
Temp. Range(°C)	0~+10	0~+10
Dimensions(mm)	1200x395x426	1500x395x426



MAIN TECHNICAL Parameters:

Model	ZQR-15L2WA
Main Power	220v/50Hz
Rate Power(kW)	0.32kW
Refrigerant	R134A
Temp. Range(°C)	+1~+4
Dimensions(mm)	1500x800x1015

MAIN TECHNICAL Parameters:

Model	ZQR-1.2S2	ZQR-1.5S2
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.18kW	0.18kW
Refrigerant	R134A	R134A
Temp. Range(°C)	0~10	0~10
Dimensions(mm)	1500x450x600	1800x450x600



WALL-MOUNTED Cabinet

DISPLAY Showcase

Armario de mostra



MAIN TECHNICAL Parameters:

Model	ZQR-420H
Main Power	220v/50Hz
Rate Power(kW)	0.18kW
Refrigerant	R134A/150g
Temp. Range(°C)	2~10
Dimensions(mm)	620x700x2200



MAIN TECHNICAL Parameters:

Model	ZQR-910H
Main Power	220v/50Hz
Rate Power(kW)	0.28kW
Refrigerant	R134A/150g
Temp. Range(°C)	2~10
Dimensions(mm)	1200x700x2200



MAIN TECHNICAL Parameters:

Model	ZQR-1380H
Main Power	220v/50Hz
Rate Power(kW)	0.36kW
Refrigerant	R134A/150g
Temp. Range(°C)	2~10
Dimensions(mm)	1836x700x2200

FREEZER

Armario de frio

Convenient, clean, healthy and environmentally friendly, be easy to store food. Thickened foaming layer, quiet, energy-efficient operation. The world famous compressor, deep and quick freezing. Universal Castor for easy moving.



MAIN TECHNICAL Parameters:

Model	ZQR-580	ZQR-680	ZQR-880
Power Consumption	1.5	1.5	1.8
Weight	120	132	168
Refrigerant	R134A	R134A	R134A
Cooling Capacity	222x2	271x2	333x2
Temp. Range(°C)	≤-18/0-10	≤-18/0-10	≤-18/0-10
Dimensions(mm)	1855x950x1090	2055x950x1090	2655x950x1090



MAIN TECHNICAL Parameters:

Model	ZQR-508
Power Consumption	3
Weight	108
Refrigerant	R134A
Cooling Capacity	333
Temp. Range(°C)	≤-18/0-10
Dimensions(mm)	2005x795x970



MAIN TECHNICAL Parameters:

Model	ZQR-288X	ZQR-338X
Power Consumption	1.5	1.8
Weight	78	98
Refrigerant	R134A	R134A
Cooling Capacity	271	333
Temp. Range(°C)	≤-18	≤-18
Dimensions(mm)	1150x655x990	1350x655x990



MAIN TECHNICAL Parameters:

Model	ZQR-338
Power Consumption	1.6
Weight	95
Refrigerant	R600A
Cooling Capacity	250
Temp. Range(°C)	≤-18/0-10
Dimensions(mm)	1440x690x935

CHEST FREEZER

ORDER DISHES Showcase



MAIN TECHNICAL Parameters:

Model	ZQR-1.6D	ZQR-1.8D	ZQR-2.0D
Power(kW)	0.37	0.45	0.51
Refrigerant	R134A	R134A	R134A
Production(kg/24h)	0-10/-6-5	0-10/-6-5	0-10/-6-5
Dimensions(mm)	1660x850x2030	1860x850x2030	2060x850x2030



MAIN TECHNICAL Parameters:

Model	ZQR-408
Power Consumption	0.91
Weight	50
Refrigerant	134A
Cooling Capacity	222
Temp. Range(°C)	-18/0
Dimensions(mm)	1330x750x950



MAIN TECHNICAL Parameters:

Model	ZQR-710
Power Consumption	2.8
Weight	108
Refrigerant	134A
Cooling Capacity	333
Temp. Range(°C)	≤-18/0-10
Dimensions(mm)	1910x750x950

MAIN TECHNICAL Parameters:

Model	ZQR-900	ZQR-1300
Power Consumption	4.5	5.2
Weight	150	198
Refrigerant	R134A	R134A
Cooling Capacity	222x2	271x2
Temp. Range(°C)	≤-18/0-10	≤-18/0-10
Dimensions(mm)	2525x815x1000	2685x930x1000



SUPERMARKET

Cabinet

Armario de supermercado



Imported compressor, durable steel, strong castors, easy move and stable, efficiency and energy saving.



MAIN TECHNICAL Parameters:

Model	ZQR-120D	ZQR-180D
Rate Power(kW)	0.165kW	0.185kW
Temp. Range(°C)	5~22	5~22
Dimensions(mm)	650x665x1670	650x750x1830



MAIN TECHNICAL Parameters:

Model	ZQR-258
Rate Power(kW)	0.52kW
Refrigerant	R22/R404A
Temp. Range(°C)	0~10
Dimensions(mm)	1580x800x2120




MEAT

Cabinet

Armario de carne

Fresh meat display cabinet can be used to display fresh meat and seafood in commercial sites. Stainless steel plate inside and outside is high quality coated steel sheet, more beautiful and fashion. Full open design, easy to get and store foods. Air curtain, saving energy. Unique air channel structure effectively promotes the air circulation and keep goods fresh and delicious.

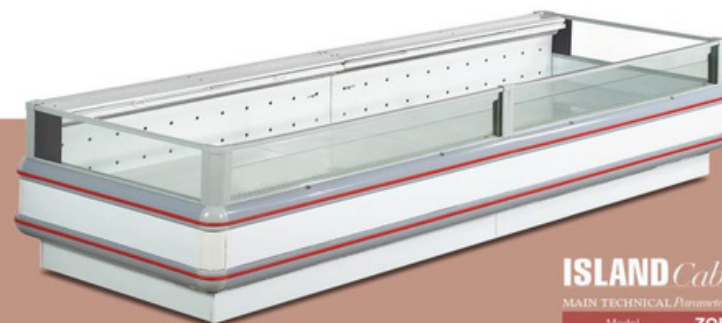

ISLAND Cabinet

MAIN TECHNICAL Parameters:

Model	ZQR-2.0M
Power(kW)	1.63kW
Refrigerant	R22/R404A
Production(°C)	-18~-22
Dimensions(mm)	2000x1080x960



MAIN TECHNICAL Parameters:

Model	ZQR-1.5	ZQR-2.0
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.733kW	0.825kW
Refrigerant	R22/R404A	R22/R404A
Temp. Range(°C)	6~-2	6~-2
Dimensions(mm)	1500x1180x920	2000x1180x920



MAIN TECHNICAL Parameters:

Model	ZQR-1.5A	ZQR-2.0A
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.458kW	0.766kW
Refrigerant	R22/R404A	R22/R404A
Temp. Range(°C)	2~-10	2~-10
Dimensions(mm)	1500x1180x1260	2000x1180x1260

MAIN TECHNICAL Parameters:

Model	ZQR-10	ZQR-20
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	0.68kW	1.46kW
Refrigerant	R22/R404A	R22/R404A
Temp. Range(°C)	2~-8	2~-8
Dimensions(mm)	1000x700x1950	2000x900x1980

MAIN TECHNICAL Parameters:

Model	ZQR-25	ZQR-30
Main Power	220v/50Hz	220v/50Hz
Rate Power(kW)	2.06kW	2.2kW
Refrigerant	R22/R404A	R22/R404A
Temp. Range(°C)	2~-8	2~-8
Dimensions(mm)	2500x900x1980	3000x900x1980

COFFEE/DRINKS



Equipment

Equipamento de café e bebidas

304 # stainless steel heating boilers. Stew pot heating systems, heating speed, with thermal protection. Stirring work system that allows a more balanced heating drinks taste more delicate.



COLA
Machine



ZQK-4X

SEMI-AUTOMATIC ESPRESSO
Coffee Machine



ZQK-1X2X

COFFEE&WATER
Machine



ZQK-120C

COFFEE
Machine (coins in)



ZQK-120D

COFFEE
Machine



ZQK-120A

Filter



ZQK-1

CHOCOLATE
Fountains



ZQK-5X

ZQK-4X

ZQK-3X

CHOCOLATE
Fusing Machine



ZQXD-8

CHOCOLATE
Slicer



ZQXD-2

LUXURY
COFFEE
Grinder



ZQK-120B

COFFEE
Grinder



ZQK-120B1



ZQK-2



ZQK-3



SMALL FOOD Machinery

Maquina de comida pequeno



SPAIN CHURROS
Machine



ZQSC-SL7L/10L



DONUT
Machine



ZQF101



ZQF-B5

ZQF-B7

MINI
Mixer



ZQF-B7A

ZQF-B7B

SAUSAGE
Stuffer



ZQF-3L
ZQF-5L
ZQF-7L
ZQF-8L
ZQF-12L
ZQF-16L



ZQF-150
ZQF-200
ZQF-300



MANUAL HAMBURGER
Machine



ZQ100*

ZQ100*

POTATO PEELING
Machine



MAIN TECHNICAL Parameters:

Model	ZQF-8A
Voltage(V/Hz)	220V/50Hz
Power(KW)	0.37KW
Capacity(Kg)	8
Net Weight(Kg)	52
Dimensions(mm)	430x410x760

CHOPPER
Mixer



ZQ-TC-4.5/16L

VEGETABLE
Shredder



ZQ-TC-55*

VEGETABLE
Shredder



ZQ-TC-65*

CHOPPER
Mixer



ZQXPS

MAIN TECHNICAL Parameters:

Model	ZQF-15A
Voltage(V/Hz)	220V/50Hz
Power(KW)	0.75KW
Capacity(Kg)	15
Net Weight(Kg)	65
Dimensions(mm)	530x440x800

MAIN TECHNICAL Parameters:

Model	ZQF-30A
Voltage(V/Hz)	220V/50Hz
Power(KW)	1.5KW
Capacity(Kg)	30
Net Weight(Kg)	109
Dimensions(mm)	780x670x890

MEAT MINCER

Machinery

Maquina de carne escarear



MEAT MINCER

Machinery



MAIN TECHNICAL Parameters:

Model	TC42A
Voltage(V)	380v 50Hz/60Hz
Power(kW)	4
Rated Input Power(kW)	4.7
Production capacity(Kg/h)	650
N.W(Kg)	170
Dimensions(mm)	1060x570x1010



MAIN TECHNICAL Parameters:

Model	ZQF-200A
Voltage(V)	220v/50Hz
Slice width(mm)	160
N.W(Kg)	14.4
Dimensions(mm)	575x465x415



MAIN TECHNICAL Parameters:

Model	ZQF-250A	ZQF-300A
Voltage(V)	220v/50Hz	220v/50Hz
Slice width(mm)	180	200
N.W(Kg)	17.7	24
Dimensions(mm)	575x465x415	615x525x500



MAIN TECHNICAL Parameters:

Model	ZQF-350
Voltage(V)	220v/50Hz
N.W(Kg)	223
Dimensions(mm)	960x740x1420



MAIN TECHNICAL Parameters:

Model	ZQF-300B
Voltage(V)	220v/50Hz
Slice width(mm)	240
N.W(Kg)	81.62
Dimensions(mm)	832x672x890



MAIN TECHNICAL Parameters:

Model	TC12A
Model	TC22A



MAIN TECHNICAL Parameters:

Model	TC12C
Voltage(V)	110v/120v 50Hz/60Hz
Power(kW)	0.55
Rated Input Power(kW)	0.86
Production capacity(Kg/h)	120
N.W(Kg)	27
Dimensions(mm)	470x240x460



MAIN TECHNICAL Parameters:

Model	TC22C
Voltage(V)	110v/120v/380v 50Hz/60Hz
Power(kW)	0.75
Rated Input Power(kW)	0.96
Production capacity(Kg/h)	220
N.W(Kg)	43
Dimensions(mm)	630x280x415



MAIN TECHNICAL Parameters:

Model	TC32C
Voltage(V)	110v/120v/380v 50Hz/60Hz
Power(kW)	1.8
Rated Input Power(kW)	2.5
Production capacity(Kg/h)	300
N.W(Kg)	63
Dimensions(mm)	770x330x500

BONE Slicing




MAIN TECHNICAL Parameters:

Model	JG400
Voltage(V)	380v 50Hz/60Hz
Power(kW)	2.2
Rated Input Power(kW)	2.9
Belt diameter(mm)	366
Cut thickness(mm)	30-400
IPNO(IPX1)	1
Saw line speed(m/s)	13.2
N.W(Kg)	185
Dimensions(mm)	970x900x1810
Material	Iron



MAIN TECHNICAL Parameters:

Model	JG300B
Voltage(V)	380v 50Hz/60Hz
Power(kW)	2
Rated Input Power(kW)	2.7
Belt diameter(mm)	300
Cut thickness(mm)	30-250
IPNO(IPX1)	1
Saw line speed(m/s)	20
N.W(Kg)	145
Dimensions(mm)	830x830x1750
Material	Stainless steel



JG180B



JG210B



JG210C

MAIN TECHNICAL Parameters:

Model	JG210B
Voltage(V)	220v 50Hz/60Hz
Power(kW)	0.75
Rated Input Power(kW)	1.1
Belt diameter(mm)	210
Cut thickness(mm)	4-180
IPNO(IPX1)	1
Saw line speed(m/s)	15
N.W(Kg)	71
Dimensions(mm)	700x600x1020
Material	Stainless steel

DOUGH MIXER

Equipment

Maquina de preparar a massa



B60

MAIN TECHNICAL Parameters:

Model	B60
Voltage(V)	380v 50Hz
Power(kW)	2.2/2.8
Rated Input Power(kW)	3.6
Bowl volume(L)	60
Max kneading capacity(Kg)	20
Mixing speed(r/min)	73/109/143/216
N.W(Kg)	490
Dimensions(mm)	620x1025x1430



CS200

Model	CS200
Voltage(V)	380v 50Hz
Power(kW)	5/7.5
Rated Input Power(kW)	10
Bowl volume(L)	200
Max kneading capacity(Kg)	75
N.W(Kg)	675
Dimensions(mm)	1400x970x1580

DOUGH MIXER



CD10



CD20/30/50

MAIN TECHNICAL Parameters:

Model	CD10	CD20	CD30	CD50
Voltage(V)	220v 50Hz	220v 50Hz	220v 50Hz	220v 50Hz
Power(kW)	0.55	0.75	1.1	2.2
Rated Input Power(kW)	0.85	1.1	1.6	2.7
Bowl volume(L)	10	21	35	50
Max kneading capacity(Kg)	5	8	12	20
Mixing speed(r/min)	165	185	185	185
Bowl speed(r/min)	15	15	15	15
N.W(Kg)	68	76	91	135
Dimensions(mm)	720x380x760	690x400x730	800x445x790	950x530x970



MAIN TECHNICAL Parameters:

Model	CD80
Voltage(V)	380v 50Hz
Power(kW)	1.5/2.4
Rated Input Power(kW)	3.9
Bowl volume(L)	80
Max kneading capacity(Kg)	25
N.W(Kg)	429
Dimensions(mm)	1160x700x1350



MAIN TECHNICAL Parameters:

Model	CD100	CD130
Voltage(V)	380v 50Hz	380v 50Hz
Power(kW)	3/4.5	2.8/5.6
Rated Input Power(kW)	6.3	7.4
Bowl volume(L)	100	130
Max kneading capacity(Kg)	40	50
N.W(Kg)	470	507
Dimensions(mm)	1160x700x1400	1250x830x1580



MAIN TECHNICAL Parameters:

Model	B10
Voltage(V)	220v 50Hz
Power(kW)	0.37
Rated Input Power(kW)	0.62
Bowl volume(L)	10
Max kneading capacity(Kg)	1
Mixing speed(r/min)	180/362
N.W(Kg)	76
Dimensions(mm)	510x480x770



MAIN TECHNICAL Parameters:

Model	B20
Voltage(V)	220v 50Hz
Power(kW)	0.75
Rated Input Power(kW)	1.1
Bowl volume(L)	20
Max kneading capacity(Kg)	6
Mixing speed(r/min)	113/168/400
N.W(Kg)	98
Dimensions(mm)	550x480x770



MAIN TECHNICAL Parameters:

Model	B30
Voltage(V)	220v 50Hz
Power(kW)	1.5
Rated Input Power(kW)	1.8
Bowl volume(L)	38
Max kneading capacity(Kg)	10
Mixing speed(r/min)	65/102/296
N.W(Kg)	192
Dimensions(mm)	720x570x1016

Model	B40
Voltage(V)	380v 50Hz
Power(kW)	1.5
Rated Input Power(kW)	1.84
Bowl volume(L)	40
Max kneading capacity(Kg)	13
Mixing speed(r/min)	96/168/306
N.W(Kg)	248
Dimensions(mm)	590x580x1230



MAIN TECHNICAL Parameters:

Model	B10L/15L
Voltage(V)	220v 50Hz
Rated Input Power(kW)	0.65
Mixing speed(r/min)	480/230/160
N.W(Kg)	48
Dimensions(mm)	460x380x590



MAIN TECHNICAL Parameters:

Model	B20L/30L
Voltage(V)	220v/380v 50Hz
Rated Input Power(kW)	1.1
Mixing speed(r/min)	360/166/100
N.W(Kg)	70
Dimensions(mm)	550x420x770



MAIN TECHNICAL Parameters:

Model	B40L/60L
Voltage(V)	220v/380v 50Hz
Rated Input Power(kW)	2.2
Mixing speed(r/min)	292/168/88
N.W(Kg)	145
Dimensions(mm)	630x560x950

PASTE DIVIDING

Equipment

Equipamento massa de divisora



ZQF-30K



ZQF-36K



ZQF-30J



ZQF-30S



ZQF-750



ZQF-100L/200L



MAIN TECHNICAL Parameters:

Model	ZQF-101PC
Voltage(V)	220v/380v 50Hz
Rated Input Power(kW)	0.9
Capacity(r/min)	25
N.W(Kg)	350
Dimensions(mm)	1550x930x1410



MAIN TECHNICAL Parameters:

Model	ZQF-201PC
Voltage(V)	220v/380v 50Hz
Rated Input Power(kW)	0.8
N.W(Kg)	380
Dimensions(mm)	1200x1110x1470



MAIN TECHNICAL Parameters:

Model	ZQF-301PC
Voltage(V)	220v/380v 50Hz
Rated Input Power(kW)	1.5
N.W(Kg)	300
Dimensions(mm)	1800x780x1810

TOAST

Moulder



ZQF-380



ZQF-31P

DOUGH *Sheeter*

Maquina de massa folhada

With special pressing wheels and scrapers, the surface can be as thin as 1mm and it is even. The foldable structure is space-saving. It can be moved easily.



LSP280A/S20A



TSP520A

MAIN TECHNICAL Parameters:

Model	LSP380A	LSP520A	TSP520A
Voltage(V)	220v 50Hz	220v 50Hz	220v 50Hz
Power(kW)	0.75	0.75	0.75
Rated Input Power(kW)	1.1	1.1	1.1
N.W(Kg)	225	260	200
Dimensions(mm)	780x2000x1030	2460x880x1240	2460x880x650



SMOKED

Furnace

Forno de defumar




XZ-30



XZ-50

SAUSAGE

Knotting Machine

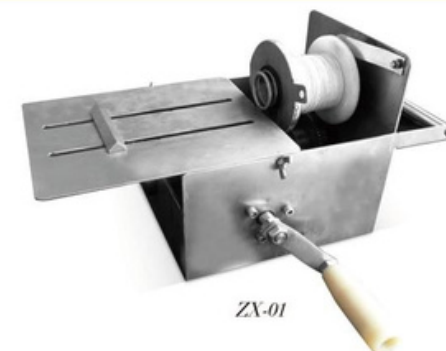

ZX-01

OVENS Series

Forno de serie

With special pressing wheels and scrapers, the surface can be as thin as 1mm and it is even. The foldable structure is space-saving. It can be moved easily.



Tunnel Type Oven

Great capacity and wide range baking scope for bread, hamburger, cake, moon cake, and biscuit and so on. Custom-built to meet specific product parameters, output and available space requirement. Our infrared tunnel oven features in high energy saving and low pollution, it can reduce energy cost over one half compared with electrical tunnel oven.



AUTOMATIC MOON-CAKE & CAKE BAKING PRODUCTION LINE



MAIN TECHNICAL Parameters:

Pan type	2 TRAYS CROSSED MODEL	4 TRAYS CROSSED MODEL
Source	Electric type	Electric type
Chamber W(mm)	1400	1800
Outer W(mm)	2050	2500
Power(Kw/m)	18	20

Hot-air Rotary Oven

Special air duct design ensure fully convection and even temperature distribution in the oven. durability and stability Heat preservation performance is good, precious little heat loss, save energy. Electrical components are adopted with original international top brand control parts, to ensure the products durability and stability.



MAIN TECHNICAL Parameters:

Model	ZQB-16C	ZQB-16D	ZQB-16Q	ZQB-32C	ZQB-32D	ZQB-32Q
Fuel(V)	DIESEL	ELECTRIC	GAS	DIESEL	ELECTRIC	GAS
Capacity(Trays)	16	16	16	32	32	32
Voltage(V)	380	380	380	380	380	380
Frequency(Hz)	50	50	50	50	50	50
Power(KW)	3.1Kw	35Kw	3.1Kw	3.5Kw	55Kw	3.5Kw
Dimensions(mm)	1430x2280x2450	1280x2280x2450	1430x2280x2450	1820x2600x2450	1660x2600x2450	1820x2600x2450

HOT-AIR CONVECTION OVEN



ZQB-5D



ZQB-8D



ZQB-10Q

MAIN TECHNICAL Parameters:

Model	ZQB-5D	ZQB-5Q	ZQB-8D	ZQB-8Q	ZQB-10D	ZQB-10Q
Voltage(V)	380V3N~	220V-380V3N~	380V3N~	220V-380V3N~	380V3N~	220V-380V3N~
Frequency(Hz)	50/60	50/60	50/60	50/60	50/60	50/60
Power(KW)	7.5Kw	0.65Kw	14.5Kw	1.3Kw	14.5Kw	1.3Kw
Pans	5	5	8	8	10	10
Dimensions(mm)	900x1270x770	900x1320x940	900x1250x1270	900x1380x1640	900x1300x1470	900x1380x1640

FERMENTATION Cabinet



Cabinete de fermentacao

Quick chilling, easy to operate, micro-pc touch control panel, 24 hour automatic programme. Air swept type refrigeration system enable the paste to be frozen in shortly time and prevent the water to losing.



MAIN TECHNICAL Parameters:

Model	ZQB-16SL	ZQB-32SL
Voltage(V)	220VAC	220VAC
Power(KW)	2.8	3.5
Temp.(°C)	15-45	18-45
Humidity(%)	80-85	80-85
Dimensions(mm)	630x900x2155	825x1120x2155

FROZEN REFRIGERATED PROOFER



MAIN TECHNICAL Parameters:

Model	ZQB-16SK	ZQB-32SK
Voltage(V)	220	220
Power(KW)	2.8Kw	3.5Kw
Temp.(°C)	30-40	30-40
Dimensions(mm)	650x900x2200	1220x900x2200



MAIN TECHNICAL Parameters:

Model	ZQB-15	ZQB-30
Voltage(V)	220	220
Power(KW)	2.0Kw	2.8Kw
Temp.(°C)	35-40	35-40
Humidity(%)	80-85	80-85
Dimensions(mm)	500x720x1833	1000x720x1833

GAS OVEN FULL-AUTOMATIC Forno de gas com automatico



MAIN TECHNICAL Parameters:

Model	ZQB-1-2G
Voltage(V)	220v
Compressor Power(KW)	0.1Kw
Heat Load(Mj/h)	27
Dimensions(mm)	1370x830x700
Gas Consumption(kg/h)	0.42



MAIN TECHNICAL Parameters:

Model	ZQB-2-4G
Voltage(V)	220v
Compressor Power(KW)	0.2Kw
Heat Load(Mj/h)	54
Dimensions(mm)	1370x833x1300
Gas Consumption(kg/h)	0.84



MAIN TECHNICAL Parameters:

Model	ZQB-3-6G
Voltage(V)	220v
Compressor Power(KW)	0.3Kw
Dimensions(mm)	1405x1050x1800

Model	ZQB-3-9G
Voltage(V)	220v
Compressor Power(KW)	0.3Kw
Dimensions(mm)	1845x1050x1800

ELECTRIC OVEN FULL-AUTOMATIC Forno de electico com automatico



MAIN TECHNICAL Parameters:

Model	ZQB-1-2D
Voltage(V)	220v 380v
Dimensions(mm)	1220x840x605



MAIN TECHNICAL Parameters:

Model	ZQB-3-6D
Voltage(V)	380v
Dimensions(mm)	1220x840x1550

Model	ZQB-3-9D
Voltage(V)	380v
Dimensions(mm)	1650x840x1550



MAIN TECHNICAL Parameters:

Model	ZQB-2-4D
Voltage(V)	380v
Dimensions(mm)	1220x840x1250

ELECTRIC PIZZA Oven

Forno de pizza com electico



MAIN TECHNICAL Parameters:

Model	PZ-1S
Power (kW)	1.6
Voltage	~220-240V
Baking Size (mm)	400x400x115x1Pc
Pizza stone Size (mm)	400x400x1Pc
Dimension (mm)	610x570x4320
N.Weight (kg)	24



MAIN TECHNICAL Parameters:

Model	PZ-2S
Power (kW)	2.4
Voltage	~220-240V
Baking Size (mm)	400x400x115x2Pcs
Pizza stone Size (mm)	400x400x2Pcs
Dimension (mm)	610x570x480
N.Weight (kg)	33



MAIN TECHNICAL Parameters:

Model	PZ-1
Voltage(V)	220/380
Compressor Power(KW)	8.4Kw
Dimension(mm)	1300x870x610



MAIN TECHNICAL Parameters:

Model	PZ-2
Voltage(V)	380
Compressor Power(KW)	16.8Kw
Dimension(mm)	1300x870x1370

Model	PZ-3
Voltage(V)	380
Compressor Power(KW)	25.2Kw
Dimension(mm)	1300x870x1670

CONVECTION Oven

WITH STEAM
Baking with
air circulation



MAIN TECHNICAL Parameters:

Model	HEO-6
Power (kW)	3.2
Dimension (mm)	680X680X600
Voltage	220/50Hz
Tray Size (mm)	371X403X100

Model	HEO-8
Power (kW)	6.4
Dimension (mm)	840X680X600
Voltage	220/50Hz
Tray Size (mm)	600X403X200



MAIN TECHNICAL Parameters:

Model	QD-04D+FS-08 S
Name	2layers4trays
Power (kW)	3.1
Voltage	220VAC 50Hz
Size (mm)	1340X1025X1895

Model	QD-04D+FS-08 S
Name	2layers4trays
Power (kW)	15.9
Voltage	220/380VAC 50Hz
Size (mm)	1340X1025X1895



MAIN TECHNICAL Parameters:

Model	HEP-12
Voltage(V)	200v 50Hz
Power (kW)	6.7
Baking Size (mm)	1100x570x360



MAIN TECHNICAL Parameters:

Model	HGP-12
Voltage(V)	200v 50Hz
Power (kW)	0.1
Heat flux(kW/h)	12
Baking Size (mm)	1120X570X430

Model	HGP-32
Voltage(V)	200v 50Hz
Power (kW)	0.2
Heat flux(kW/h)	30
Baking Size (mm)	2200X1060X430



MAIN TECHNICAL Parameters:

Model	CSS1.2LC	CSS1.5LC	CSS1.8LC
Voltage	220v 50Hz	220v 50Hz	220v 50Hz
Power(kW)	0.18	0.21	0.26
Cabinet temp. (°C)	5-10°C	5-10°C	5-10°C
Refrigerant	R134a	R134a	R134a
Packing size(mm)	1250x440x370	1550x440x370	1850x440x370

SUSHI & CAKE Showcase

Armario de mostra bolo -sushi



MAIN TECHNICAL Parameters:

Model	CL428FLx4
Voltage	220v 50Hz
Power(kW)	0.53
Cabinet temp. (°C)	5-10°C
Refrigerant	R134a
Dimensions(mm)	740x740x2050



MAIN TECHNICAL Parameters:

Model	WL-12
Voltage	220v
Power(kW)	0.57
Refrigerant	R22/R134a
Dimensions(mm)	1200x730x1250

Model	WL-15
Voltage	220v
Power(kW)	0.7
Refrigerant	R22/R134a
Dimensions(mm)	1500x730x1250

Model	WL-18
Voltage	220v
Power(kW)	0.8
Refrigerant	R22/R134a
Dimensions(mm)	1800x730x1250

Model	WL-20
Voltage	220v
Power(kW)	0.92
Refrigerant	R22/R134a
Dimensions(mm)	2000x730x1250



MAIN TECHNICAL Parameters:

Model	WLT-68
Voltage(V)	220
Power(KW)	0.32
Refrigerant	R22/R134a
Dimensions(mm)	900x500x710



MAIN TECHNICAL Parameters:

Model	WLK-12	WLK-15	WLK-18
Voltage(V)	220	220	220
Power(KW)	0.14	0.18	0.18
Dimensions(mm)	1250x740x1220	1500x740x1220	1800x740x1220



MAIN TECHNICAL Parameters:

Model	WH3-12	WH3-15	WH3-18
Voltage	220v	220v	220v
Power(kW)	0.6	0.74	0.86
Refrigerant	R134a	R134a	R134a
Dimensions(mm)	1200x780x1320	1500x780x1320	1800x780x1320



MAIN TECHNICAL Parameters:

Model	FH-120	FH-150	FH-180
Voltage	220v	220v	220v
Power(kW)	0.57	0.7	0.8
Refrigerant	R134a	R134a	R134a
Dimensions(mm)	1200x700x1250	1500x700x1250	1800x700x1250

POPCORN Machine

Maquina de pipoca



LC Cart



ZQP-01

COTTON CANDY Machine



ZQP-02



ZQP-90-C



ZQP-90B



ZQP-90A



ZQP-90I



ZQP-90J



ZQP-90I

POPCORN Machine

INSULATED

Carrier

Caixa de conservar de calor



HEAT INSULATION Box



ZQF-90-1

ICE STORAGE



ZQF-112-6

ADJUSTABLE DISH Vehicle



ZQF-200-8

ADJUSTABLE DISH Vehicle



ZQF-300-20

HAND SEALING Machine



ZQF-30-H
ZQF-40-H

VACUUM PACING Machine



ZQF-400

VACUUM PACING Machine (vacration)



ZQF-400-2B

WATER PURIFICATION Equipment



BARBECUE

Grill

Forno de carvão vegetal



BARBECUE Stove



ZQW-11B204



ZQW-11B214



ZQW-DRI-1

HEAT DUTY GAS Convection Oven



ZQW-6SL

Plucker



ZQW-1100W

BARBECUE Stove



ZQW-104

CHARCOAL Grill



ZQJ-1H



ZQJ-6H



ZQJ-F(1.0F/1.5F/2.0F)



ZQJ-2H

COOKING



Range

Fogao para cozinha

All the machine body made by high grade stainless steel, strong and durable. Electronic direct spark ignition for gas model, also flame failure safety device for each control to make sure safe operation.



GAS RANGE WITH BURNER & GAS OVEN



GAS RANGE WITH 6-Burner With & Gas Oven:

Model	ZQW-889-8(900)	ZQW-889-8D(700)
Dimensions(mm)	1580x900x970	1400x750x910
Thermal Power(MJ)	239	239
Weight(Kg)	170	150



GAS RANGE WITH 4-Burner With & Gas Oven:

Model	ZQW-878D(700)	ZQW-878(900)
Dimensions(mm)	700x750x910	800x900x970
Thermal Power(MJ)	131.7	131.7
Weight(Kg)	80	90



GAS RANGE WITH 6-Burner With & Gas Oven:

Model	ZQW-889D(700)	ZQW-889(900)
Dimensions(mm)	1050x750x910	1200x900x970
Thermal Power(MJ)	179.9	179.9
Weight(Kg)	140	150



ELECTRIC RANGE WITH HOT PLATE & OVEN



ELECTRIC RANGE WITH 4-Hot Plate & Oven:

Model	ZQW-893(900)
Dimensions(mm)	800x900x970
Volt(V)	3N~380V
Power(kW)	20.8
Weight(Kg)	80

TANK Fryer

Fridadeira

Equipped with flame failure protection device, temperature controller, and thermocouple safety device. New design burner, for quick flame delivery, and good combustion performance.



GAS 1-Tank Fryer (2-Basket):

Model	ZQW-2G
Dimensions(mm)	380x720x1050
Thermal Power(MJ)	65
Capacity(L)	28
Weight(Kg)	60



GAS FRYER (2-Tank & 2-Basket) With Cabinet:

Model	ZQW-839(900)
Dimensions(mm)	800x900x970
Thermal Power(MJ)	125.9
Weight(Kg)	100

Model	ZQW-839D(700)
Dimensions(mm)	700x750x910
Thermal Power(MJ)	111.5
Weight(Kg)	90



ELECTRIC Tank Fryer (1-Basket):

Model	ZQW-28L
Dimensions(mm)	400x800x1100
Volt(V)	3N~380V
Power(kW)	18
Capacity(L)	28
Weight(Kg)	60

ELECTRIC Tank Fryer (2-Basket):

Model	ZQW-28L-2
Dimensions(mm)	800x800x1100
Volt(V)	3N~380V
Power(kW)	18+18
Capacity(L)	28x2
Weight(Kg)	100



ELECTRIC 1-Tank Fryer (1-Basket):

Model	ZQW-965
Dimensions(mm)	400x900x970
Volt(V)	3N~380V
Power(kW)	12
Thermal Power(MJ)	/
Capacity(L)	20
Weight(Kg)	35



ELECTRIC/GAS 2-Tank Fryer (2-Basket):

Model	ZQW-84	ZQW-75
Dimensions(mm)	590x510x960	570x510x970
Volt(V)	220~240V	/
Power(kW)	4+4	/
Thermal Power(MJ)	/	37.8
Capacity(L)	14x2	14
Weight(Kg)	26	23



ELECTRIC 3-Tank Fryer (3-Basket):

Model	ZQW-26-3
Dimensions(mm)	800x840x940
Volt(V)	3N~380V
Power(kW)	4.5+4.5+4.5
Capacity(L)	16x3
Weight(Kg)	74



ELECTRIC Fryer (1/2-Basket):

Model	ZQW-101	ZQW-102
Dimensions(mm)	280x460x325	570x460x325
Volt(V)	220	220
Power(kW)	4	4+4
Temp. Range(°C)	60~200	60~200
Capacity(L)	10	10+10
Weight(Kg)	7.5	11



GAS Fryer (1/2-Basket):

Model	ZQW-171	ZQW-172
Dimensions(mm)	340x615x630	680x615x630
Gas Pressure(pa)	2800~3000	2800~3000
Gas	Bottle LPG	Bottle LPG
Temp. Range(°C)	60~200	60~200
Capacity(L)	17	17+17
Weight(Kg)	22	38



ELECTRIC Pressure Fryer (Digital Panel):

Model	ZQW-25	ZQW-25D	ZQW-25G
Dimensions(mm)	470x920x1180	470x920x1180	500x1030x1180
Volt(V)	3N~380V	3N~380V	220
Power(kW)	12	13.5	0.1
Gas Consumption	/	/	About 0.48kg/h
Capacity(L)	25	25	25
Weight(Kg)	95	135	160



COUNTER TOP ELECTRIC (1-Tank Fryer) (1-Basket):

Model	ZQW-81
Dimensions(mm)	290x460x310
Volt(V)	220~240V
Power(kW)	2.5
Weight(Kg)	4.6

COUNTER TOP ELECTRIC (2-Tank Fryer) (2-Basket):

Model	ZQW-82
Dimensions(mm)	580x460x310
Volt(V)	220~240V
Power(kW)	2.5+2.5
Weight(Kg)	4.6



GAS 1-Tank Fryer (2-Basket):

Model	ZQW-71
Dimensions(mm)	290x520x445
Thermal Power(MJ)	18.9
Capacity(L)	8L
Weight(Kg)	12

Model	ZQW-72
Dimensions(mm)	580x520x445
Thermal Power(MJ)	37.8
Capacity(L)	8+8L
Weight(Kg)	22

GRIDDLE

Series

Serie de frigideira



It has wide applications & is suitable for restaurants, takeaways, cafes, delis, etc.

COUNTER TOP GAS GRIDDLE / *Fig.*

Model	ZQW-600G	ZQW-718	ZQW-720
Dimensions(mm)	600x520x450	610x560x400	790x590x400
Thermal Power(MJ)	220	29	43.5
Weight(Kg)	34	29	43
Burner	2	2	3

GAS GRIDDLE WITH CABINET / *Fig.*

Model	ZQW-869 (900)	ZQW-869D (700)
Dimensions (mm)	800x900x970	700x750x910
Thermal Power(MJ)	100.8	86.4
Weight(Kg)	70	65

COUNTER TOP ELECTRIC GRIDDLE / *Fig.*

Model	ZQW-818	ZQW-820
Dimensions (mm)	550x450x230	730x500x230
Volt(V)	220	220
Power(kW)	3	4.4
Weight(Kg)	23	34

Model	ZQW-822
Dimensions(mm)	730x500x230
Volt(V)	220
Power(kW)	4.2
Weight(Kg)	31.6

Model	ZQW-600E
Dimensions(mm)	600x520x110
Volt(V)	220
Power(kW)	5
Weight(Kg)	33

GAS RANGE WITH 4-Burner & Griddle & Oven

Model	ZQW-889A (900)	ZQW-889XD (700)
Dimensions (mm)	1200x900x970	1050x900x910
Thermal Power(MJ)	79500BTU/hr	179.9
Weight(Kg)	150	140



GAS ELECTRIC Crepe Maker

Model	ZQW-1E	ZQW-2G
Dimensions (mm)	450x540x300	860x500x240
Volt(V)	/	220
Thermal Power(MJ)	36.5	/
Power(kW)	/	5
Weight(Kg)	25	42



COUNTER TOP GAS RANGE 2-Burner

Model	ZQW-RB-1	ZQW-RB-2
Dimensions (mm)	460x550x500	460x1100x500
Thermal Power(MJ)	58.6	117.2
Burner	1	2
Weight(Kg)	47	85



TABLE TOP Bain marie

Model	ZQW-BM-1
Dimensions(mm)	345x275x460
Power(kW)	2
Temp. Range(°C)	30-110

CONTACT

Griddle



ZQW811



ZQW811E

CONTACT Griddle

Model	ZQW811	ZQW811E	ZQW813-2
Dimensions(mm)	305x365x210	430x365x210	565x365x210
Volt(V)	220/50	220/50	220/50
Power(kW)	1.8	2.2	3.6
Weight(Kg)	14	19.6	24.5

CONE Baker

Model	ZQW-ZU-1	ZQW-ZU-2
Dimensions (mm)	250x330x280	500x330x280
Volt(V)	220	220
Power(kW)	1.3	2.6
Weight(Kg)	8	15



ZQW-ZU-1

WAFFLE Baker

Model	ZQW-UB-1	ZQW-UB-2
Dimensions (mm)	250x330x280	500x330x280
Volt(V)	220	220
Power(kW)	1.3	2.6
Weight(Kg)	8	15



ZQW-UB-2

ELECTRIC Pan Toaster

Model	ZQW-212
Dimensions(mm)	406x660x290
Volt(V)	220
Power(kW)	2.4
Weight(Kg)	28



ZQW-212

FOOD Warmer

Comida de calor



FOOD Warmer:

Model	ZQW-3	ZQW-310	ZQW-2
Dimensions(mm)	860x370x420	330x560x500	780x530x700
Volt(V)	220V	220V	220V
Power(kW)	1	1	1
Weight(Kg)	13	8	12.5



CURVED GLASS Warming Showcase:

Model	ZQW-60-1	ZQW-60-2	ZQW-60-3	ZQW-2P
Dimensions(mm)	900x480x610	660x437x655	1200x480x810	660x500x620
Volt(V)	220V	220V	220V	220V
Power(kW)	1.84	1.84	2.2	1.2
Weight(Kg)	50	37	72	25



ELECTRIC Toaster:

Model	ZQW-150	ZQW-300	ZQW-4ATS	ZQW-6ATS
Dimensions(mm)	418x288x387	418x368x387	370x210x225	460x210x225
Volt(V)	220V	220V	220V	220V
Power(kW)	1.34	1.94	1.9	2.5
Weight(Kg)	14	16	6	7
Production(Pcs/h)	150-180	300-350	/	/



COUNTER TOP Chafery Warmer:

Model	ZQW-8
Dimensions(mm)	800x710x650
Volt(V)	220V
Power(kW)	0.72
Weight(Kg)	30



HOT DOG Warmer:

Model	ZQW-7C
Dimensions(mm)	470x350x570
Volt(V)	220V
Power(kW)	0.7
Weight(Kg)	10.3



ELECTRIC Display Showcase:

Model	ZQW-1P
Dimensions(mm)	350x425x550
Volt(V)	220V
Power(kW)	0.85
Weight(Kg)	16



ELECTRIC Display Showcase:

Model	ZQW-580
Dimensions(mm)	640x360x530
Volt(V)	220V
Power(kW)	1
Weight(Kg)	21



ELECTRIC Display Showcase:

Model	ZQW-2x2	ZQW-2x3
Dimensions(mm)	700x640x730	1000x640x730
Volt(V)	220V	220V
Power(kW)	0.7	1.4
Weight(Kg)	33	45



ELECTRIC Food Warmer Cabinet:

Model	ZQW-11-21	ZQW-11-5F
Dimensions(mm)	790x975x1795	790x975x1350
Volt(V)	220-240	220-240
Power(kW)	3	3
Weight(Kg)	182	136



CENTER Island:

Model	ZQW-02-OT
Dimensions (mm)	1500x760x800
Weight(Kg)	69



CHIPS Warmer:

Model	ZQW-9	ZQW-10
Dimensions(mm)	600x770x1570	1050x770x1570
Volt(V)	220V	220V
Power(kW)	1	1
Weight(Kg)	45	85



ELECTRIC Salamander:

Model	ZQW-936	ZQW-937
Dimensions(mm)	570x340x206	800x450x170
Volt(V)	220V	220V
Power(kW)	2	4
Weight(Kg)	17	28



COUNTER TOP ELECTRIC Quartz Salamander:

Model	ZQW-ES-1	ZQW-ES-2
Dimensions(mm)	500x290x250	500x290x380
Volt(V)	220-240	220-240
Power(kW)	2	3
Weight(Kg)	16	23



DONER Kebab



MAIN TECHNICAL Parameters:

Model	ZQW-22	ZQW-800	ZQW-850	ZQW-950	ZQW-960
Dimensions(mm)	290x240x450	580x630x880	580x650x950	580x650x950	580x650x1150
Volt(V)	220	220	220	220	220
Power(kW)	2	9	6	15	16
N.Weight(Kg)	5.5	23	26	23	27

CHICKEN Rotisseries



MAIN TECHNICAL Parameters:

Model	ZQW-268E	ZQW-268G
Dimensions(mm)	1030x600x800	1010x780x800
Volt(V)	220	220
Power	6kW	9kW/HP
N.Weight(Kg)	71	81

MAIN TECHNICAL Parameters:

Model	ZQW-201 (1-Layer)	ZQW-202 (2-Layer)
Dimensions(mm)	1000x900x1060	1000x900x1900
Volt(V)	3N-380V	3N-380V
Power(kW)	10	10+10kW
N.Weight(Kg)	179	358

Electric / Gas chicken rotisseries:

Model	ZQW-206	ZQW-207
Dimensions(mm)	670x650x1580	670x650x1580
Volt(V)	220	220
Power(kW)	7	2
N.Weight(Kg)	106	106

Electric / Gas two full lamp chicken rotisseries:

Model	ZQW-206-2	ZQW-207-2
Dimensions(mm)	1340x650x1580	1340x650x1600
Volt(V)	220	220
Power(kW)	14	14
N.Weight(Kg)	180	180

BURNERS Stove



MAIN TECHNICAL Parameters:

Model	ZQW-33
Dimensions(mm)	800x800x500
m³	0.32
N.Weight(Kg)	45

Model	ZQW-34
Dimensions(mm)	1200x800x500
m³	0.48
N.Weight(Kg)	65

Model	ZQW-35
Dimensions(mm)	1500x800x500
m³	0.6
N.Weight(Kg)	85

ROTISSERIE Ovens



MAIN TECHNICAL Parameters:

Model	ZQW-3P-E	ZQW-3P-G
Dimensions(mm)	1180x490x710	1180x490x710
Volt(V)	380V 50Hz	220-240V 50Hz
Power(kW)	6	0.2
N.Weight(Kg)	50	60



MAIN TECHNICAL Parameters:

Model	ZQW-6P-E	ZQW-6P-G
Dimensions(mm)	1185x490x1350	1185x490x1350
Volt(V)	380V 50Hz	220-240V 50Hz
Power(kW)	12.3	0.3
N.Weight(Kg)	75	85

BAIN MARIE

Series



MAIN TECHNICAL Parameters:

Model	ZQS-B07
Dimensions(mm)	1500X1400X850+700
Voltage(V)	220
Power(kW)	4
Pan	8x(1/1x150)



MAIN TECHNICAL Parameters:

Model	ZQS-B01
Dimensions(mm)	1455x670x800+600
	1790x670x800+600
	2125x670x800+600



MAIN TECHNICAL Parameters:

Model	ZQS-BM3
Dimensions(mm)	950x365x330
Voltage(V)	220V 50Hz
Power(kW)	1



MAIN TECHNICAL Parameters:

Model	ZQS-BM4
Dimensions(mm)	1215x365x330
Voltage(V)	220V 50Hz
Power(kW)	1.5



Model	ZQS-BM5
Dimensions(mm)	1485x365x330
Voltage(V)	220V 50Hz
Power(kW)	1.8



Model	ZQS-BM5C
Dimensions(mm)	1485x365x330
Voltage(V)	220V 50Hz
Power(kW)	1.8



Model	ZQS-B04/B05/B06
Dimensions(mm)	1455x670x800+600
	1790x670x800+600
	2125x670x800+600



Model	ZQS-4H/5H/6H
Dimensions(mm)	1450x670x800
	1780x670x800
	2125x670x800

DISH-WASHING

Machine

Maquina de lava louça



A button to complete the cleaning and drying sterilization. Several kinds in the washing mode arbitrary choice. Stainless steel, triple filtration residue. 24-hour reservation cleaning, peak load shifting.



ZQS-110



ZQS-210



ZQS-320/301D



ZQS-401D/402D

ZQS-402D



ZQS-WD120



ZQS-JD60

STAINLESS

Steel series



Now you are look at our heavy duty kitchen folding stainless steel work table & sink table, they are the unsung hero of every commercial kitchen. The kitchen can not operate without the help of this kitchen folding stainless steel work table.



MAIN TECHNICAL Parameters:

Model	ZQS-1T
Dimensions(mm)	600x600x800 900x600x800



MAIN TECHNICAL Parameters:

Model	ZQS-1T+1F
Dimensions(mm)	1100x600x800
Model	ZQS-2/2T
Dimensions(mm)	1200x650x800



MAIN TECHNICAL Parameters:

Model	ZQS-2T+1F
Dimensions(mm)	1600x650x800



MAIN TECHNICAL Parameters:

Model	ZQS-3T
Dimensions(mm)	1600x650x800



MAIN TECHNICAL Parameters:

Model	ZQS-1.2
Dimensions(mm)	1200x600x800
Model	ZQS-1.5
Dimensions(mm)	1500x800x800
Model	ZQS-1.8
Dimensions(mm)	1800x800x800
Model	ZQS-2
Dimensions(mm)	2000x800x800



MAIN TECHNICAL Parameters:

Model	ZQS-120/150
Dimensions(mm)	1200x500x1550
Model	ZQS-121/151
Dimensions(mm)	1500x500x1550



MAIN TECHNICAL Parameters:

Model	ZQS-150A3
Dimensions(mm)	1500x800x800 +700
Model	ZQS-180A3
Dimensions(mm)	1800x800x800 +700

FLAT TRAILER



ZQIS

COLLECTION Cart



ZQSS

FRUIT Table



ZQIS



SERVICE Cart A



ZQSS

SERVICE Cart B



ZQSW

SERVICE Cart C



ZQSS



ZQSW



ZQSW



ZQSW



CABINET

MAIN TECHNICAL Parameters

Model	ZQZ-1500/1500A	ZQZ-1800/1800A
Dimensions(mm)	1200x500x1800	1500x500x1800

MAIN TECHNICAL Parameters

Model	ZQZ-1200/1200B	ZQZ-1500B
Dimensions(mm)	1500x800x800	1800x800x800

WALL Cabinet



MAIN TECHNICAL Parameters

Model	ZQZ-1200C
Dimensions(mm)	1200x350x600
Model	ZQZ-1500C
Dimensions(mm)	1500x350x600

WALL SHELVES Pipe Rack



MAIN TECHNICAL Parameters

Model	ZQZ-1200D
Dimensions(mm)	900x300x300
Model	ZQZ-1200D
Dimensions(mm)	1200x300x300
Model	ZQZ-1200D
Dimensions(mm)	1500x300x300

TEA Cabinet




ZQZ-1100

HYDRO VENT EXHAUST Hood

AIR
Blower

ENERGY SAVING *Coldroom*

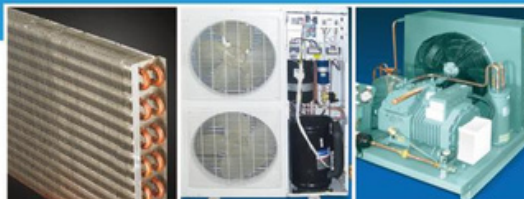

FOOD SELLING *selling cart*

Both sides of the materials are double-glassed steel with high strength, light weight, corrosion resistant, compartment temperature, fire protection features.



CHAFINGDISH

Stainless Steel

G u b a d e c o m i d a

Easy to clean. Portable and new design. High quality stainless steel. Attractive and safe.



ZQ-C1



ZQ-C3



ZQ-C4



ZQ-C2



ZQ-C5



ZQ-C6



ZQ-C7



ZQ-C8

CHAFINGDISH

Stainless Steel



ZQ-C9



ZQ-C10



ZQ-C11



ZQ-C12



ZQ-C13



ZQ-C14



ZQ-C15



ZQ-C16



WATER BOILING

Stainless Steel



ZQ-15L/25L/30L/35L/40L



ZQ-C17

ZQ-C18

SOUP POT

Stainless Steel

RICE COOKER

Electronic



ZQ-C19

ZQ-C20

STAINLESS STEEL Pot



MAIN TECHNICAL Parameters:

MEAN (mm)	THICKNESS(mm)	ALUMINUM(mm)	CAPACITY(L)	O3STYLE	O4STYLE	O5STYLE
Dia.250x(H)250	1.0	4	12	B0060	B0089	B0118
Dia.300x(H)300	1.0	4	21	B0062	B0091	B0120
Dia.340x(H)340	1.0	4	31	B0064	B0093	B0122
Dia.400x(H)400	1.0	4	50	B0067	B0096	B0125
Dia.450x(H)450	1.2	5	71	B0068	B0097	B0126
Dia.500x(H)500	1.2	5	98	B0069	B0098	B0127
Dia.550x(H)550	1.2	5	130	B0071	B0100	B0129
Dia.600x(H)600	1.2	5	170	B0074	B0103	B0132
Dia.250x(H)180	1.0	4	9	B0077	B0106	B0135
Dia.300x(H)200	1.0	4	14	B0078	B0107	B0136
Dia.340x(H)220	1.0	4	22	B0080	B0109	B0138
Dia.400x(H)260	1.2	4	32	B0083	B0112	B0141
Dia.450x(H)280	1.2	4	44	B0084	B0115	B0142
Dia.500x(H)300	1.2	5	58	B0085	B0114	B0143
Dia.550x(H)350	1.2	5	83	B0086	B0115	B0144
Dia.600x(H)400	1.2	5	113	B0087	B0116	B0145

CHOPPING Board



MAIN TECHNICAL Parameters:

Model	Diameter(mm)	Box(pcs)
6213CR	18"x12"x0.5" 460x310x12mm	12
6213CD		
6213CW		
6213CC		
6213CB		
6213CN	20"x15"x0.5" 510x380x12mm	6
6215CR		
6215CD		
6215CW		
6215CC		
6215CB		
6215CN		

PLASTIC Tray



MAIN TECHNICAL Parameters:

MEAN.(mm)	Dimension(IN.)	Box(PCS)
81140	13"x10" IN. 350x270mm	40PCS
81240	16x12 IN.	40PCS
81340	18x14 IN.	30PCS

DISPENSER Series

CERAMIC
Dispenser

ZQ-G4



ZQ-G5



ZQ-G6

FOOD
Basket

ZQ-G7



ZQ-G8

WATER POT Stainless Steel

ZQ-G9



Ischaemum pot

ZQ-G10



Ischaemum pot

ZQ-G11



Mirror Vacuum pot

ZQ-G12



Seasoning a set series

ZQ-G13



Stainless steel ice cream spoon

ZQ-G14



Lamange gravy boat

ZQ-G15



Netting knife

ZQ-G16



Stick ice cream spoon

ZQ-G17



Stainless steel whisk

PARTS Series



HEAVY Duty ladles

MAIN TECHNICAL Parameters:

Model	Volume (ml)	Diameter (cm)	Box (pcs)
M4611LA	30	Ø5.0x28cm	72
M4612LA	70	Ø6.5x30cm	72
M4613LA	120	Ø8.0x32cm	72
M4614LA	200	Ø9.0x33cm	48
M4615LA	250	Ø10.0x37cm	48
M4616LA	330	Ø11.0x38cm	24
M4617LA	500	Ø12.0x40cm	24
M4618LA	1000	Ø14.0x44cm	24
M4619LA	1000	Ø16.0x47cm	12
M4610LA	2000	Ø20.0x55cm	12



SKIMMERS

MAIN TECHNICAL Parameters:

Model	Diameter (cm)	Box (pcs)
M46310SM	Ø10x38.7	36
M46312SM	Ø12x44.3	36
M46314SM	Ø13.5x48.5	36
M46315SM	Ø15x51.6	36
M46316SM	Ø16x54	24
M46318SM	Ø18x60.1	24
M46322SM	Ø22x70	24
M46324M	Ø24x76.5	12



FRYING Pan

MAIN TECHNICAL Parameters:

MEAN. (mm)	Note	Code
Dia.200xH050	Single handle	B0050
Dia.240xH050	Single handle	B0052
Dia.280xH050	Single handle	B0054
Dia.300xH050	Handle & ear	B0055
Dia.320xH050	Handle & ear	B0056
Dia.400xH050	Double & ear	B0058

BAKERY Equipment



BE-01



BE-02




BE-03




BE-07



BE-12



BE-13



BE-04



BE-05



BE-06



BE-08



BE-14



BE-15



BE-09



BE-10



BE-11



BE-16



BE-17



BE-18



MAIGA & CO®

INTERNATIONAL



ALLAH KI YIRIWA



+90 535 941 47 28

+223 74 73 00 06

WWW.MAIGACO.COM

MAHAMADOUAIGA906@YAHOO.COM

ZAFER MAH ADILE NASIT BULVARI SEHIR MERKEZI
HOME OFIS BLOK KAT 16 No 191 ESENYURT ISTANBUL